
Floating Liquefied Natural Gas (FLNG) Applications Flame & Combustion Management Solutions





Burner & Efficiency Controls

Flame Safeguard Controls

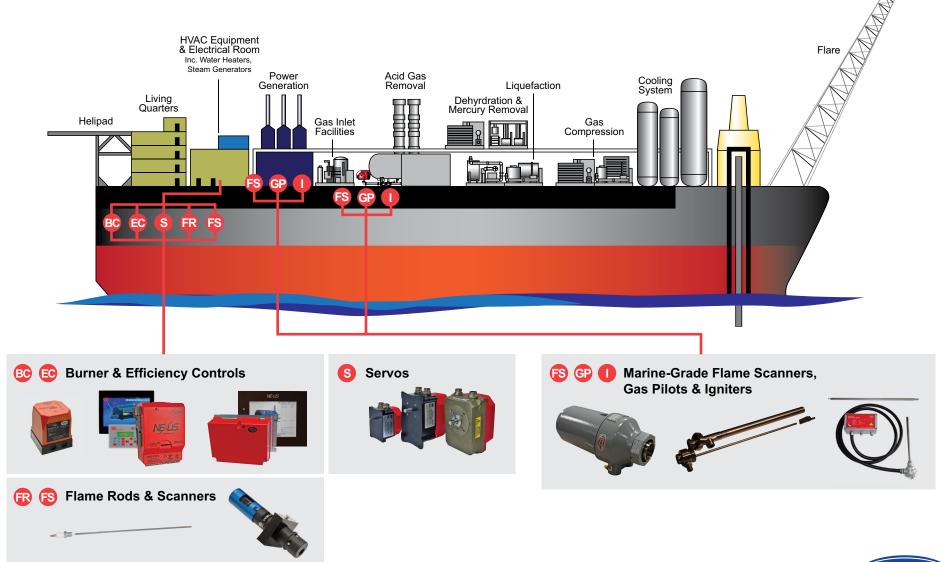

- BurnerPro™
- BurnerLogix®
- · Flame Monitor
- MicroM

Efficiency Controls



- Nexus® NXF4000
- Nexus PPC4000
- Nexus NX6100
- Nexus PPC6000

CM-420 Combustion Monitor

Provides oxygen percentage via 4-20mA or Modbus for PLC. Scada or building management systems. Used in conjunction with the NXCESO2.



Flame Scanners

Discrete Flame Scanners



- UV90L (Ultraviolet)
- 45UV5 (Ultraviolet / Self Check)
- 48PT2 (Infrared)

Integrated Flame Scanners



• Insight Series 4 (Ultraviolet or Infrared)

SureFire[™] Gas Pilots

Natural or Forced-**Draft Gas Pilots** suitable for majority of Power, Refinery and other



applications with outer diameter options of 32mm or 48mm, for intermittent or continuous duty, Class 1 to 3.

FX Servo Motors

The Fireye **FX Series** servo motors are precision actuators designed to accurately position valves and dampers.

Flame Rods



The 69ND1 Fireye flame rod is made from high temperature resistant metal and can be used to detect gas flames only.

Oxygen Probe

The Fireye NXCES02 oxygen probe is designed to provide continuous oxygen concentration readings.

SureFire II Igniter

High-Energy Ignition System for direct spark ignition of most gas or liquid fuels used in oil or gas pilots or main burners.





For more information, please <u>contact</u> your local OEM or Fireye Distributor.

fireye.com

MF-00-2-000F-0-031-A (2022/01) All trademarks and service marks referred herein are property of their respective owners. ©2022 Carrier. All Rights Reserved. A Carrier Company







